

```
In [1]: %matplotlib inline
```

DCGAN Tutorial

Author: Nathan Inkawich <<https://github.com/inkawich>> __

```
In [2]: from __future__ import print_function
        #%matplotlib inline
        import argparse
        import os
        import random
        import torch
        import torch.nn as nn
        import torch.nn.parallel
        import torch.backends.cudnn as cudnn
        import torch.optim as optim
        import torch.utils.data
        import torchvision.datasets as dset
        import torchvision.transforms as transforms
        import torchvision.utils as vutils
        import numpy as np
        import matplotlib.pyplot as plt
        import matplotlib.animation as animation
        from IPython.display import HTML

        # Set random seed for reproducibility
        manualSeed = 999
        #manualSeed = random.randint(1, 10000) # use if you want new results
        print("Random Seed: ", manualSeed)
        random.seed(manualSeed)
        torch.manual_seed(manualSeed)

        # Root directory for dataset
        dataroot = "data/celeba"

        # Number of workers for dataloader
        workers = 2

        # Batch size during training
        batch_size = 128

        # Spatial size of training images. All images will be resized to this
        # size using a transformer.
        #image_size = 64
        image_size = 32

        # Number of channels in the training images. For color images this is 3
        #nc = 3
        nc = 1

        # Size of z latent vector (i.e. size of generator input)
        nz = 100

        # Size of feature maps in generator
        #ngf = 64
        ngf = 8

        # Size of feature maps in discriminator
        #ndf = 64
        ndf = 8

        # Number of training epochs
```

```
num_epochs = 5

# Learning rate for optimizers
lr = 0.0002

# Beta1 hyperparam for Adam optimizers
beta1 = 0.5

# Number of GPUs available. Use 0 for CPU mode.
ngpu = 1

Random Seed: 999
```

Data

In this tutorial we will use the Celeb-A Faces

dataset <<http://mmlab.ie.cuhk.edu.hk/projects/CelebA.html>> **which can be downloaded at the linked site, or in Google**

Drive <<https://drive.google.com/drive/folders/0B7EVK8r0v71pTUZsaXdaSnZBZzg>> . The dataset will download as a file named *img_align_celeba.zip*. Once downloaded, create a directory named *celeba* and extract the zip file into that directory. Then, set the *dataroot* input for this notebook to the *celeba* directory you just created. The resulting directory structure should be:

::

```
/path/to/celeba -> img_align_celeba
-> 188242.jpg -> 173822.jpg -> 284702.jpg -> 537394.jpg ...
```

This is an important step because we will be using the ImageFolder dataset class, which requires there to be subdirectories in the dataset's root folder. Now, we can create the dataset, create the dataloader, set the device to run on, and finally visualize some of the training data.

```
In [3]: # We can use an image folder dataset the way we have it setup.
# Create the dataset
#dataset = dset.ImageFolder(root=dataroot,
#                             transform=transforms.Compose([
#                                 transforms.Resize(image_size),
#                                 transforms.CenterCrop(image_size),
#                                 transforms.ToTensor(),
#                                 transforms.Normalize((0.5, 0.5, 0.5),
# (0.5, 0.5, 0.5))),
#                             ]))
dataset = dset.MNIST(
    '../data', train=True, download=True,
    transform=transforms.Compose([
        transforms.Resize(image_size),
        transforms.CenterCrop(image_size),
        transforms.ToTensor(),
        transforms.Normalize((0.5, ), (0.5, ))
    ]))

# Create the dataloader
dataloader = torch.utils.data.DataLoader(dataset, batch_size=batch_size,
                                          shuffle=True, num_workers=worke
rs)

# Decide which device we want to run on
device = torch.device("cuda:0" if (torch.cuda.is_available() and ngpu >
0) else "cpu")

# Plot some training images
real_batch = next(iter(dataloader))
plt.figure(figsize=(8,8))
plt.axis("off")
plt.title("Training Images")
plt.imshow(np.transpose(vutils.make_grid(real_batch[0].to(device)[:64],
padding=2, normalize=True).cpu(),(1,2,0)))
```

Out[3]: <matplotlib.image.AxesImage at 0x120157f60>

Training Images



```
In [4]: # custom weights initialization called on netG and netD
def weights_init(m):
    classname = m.__class__.__name__
    if classname.find('Conv') != -1:
        nn.init.normal_(m.weight.data, 0.0, 0.02)
    elif classname.find('BatchNorm') != -1:
        nn.init.normal_(m.weight.data, 1.0, 0.02)
        nn.init.constant_(m.bias.data, 0)
```

In [5]: *# Generator Code*

```

class Generator(nn.Module):
    def __init__(self, ngpu):
        super(Generator, self).__init__()
        self.ngpu = ngpu
        self.main = nn.Sequential(
            # input is z, going into a convolution
            nn.ConvTranspose2d( nz, ngf * 4, 4, 1, 0, bias=False),
            nn.BatchNorm2d(ngf * 4),
            nn.ReLU(True),
            # state size. (ngf*8) x 4 x 4
            nn.ConvTranspose2d(ngf * 4, ngf * 2, 4, 2, 1, bias=False),
            nn.BatchNorm2d(ngf * 2),
            nn.ReLU(True),
            # state size. (ngf*4) x 8 x 8
            nn.ConvTranspose2d( ngf * 2, ngf, 4, 2, 1, bias=False),
            nn.BatchNorm2d(ngf),
            nn.ReLU(True),
            # state size. (ngf*2) x 16 x 16
            #nn.ConvTranspose2d( ngf * 2, ngf, 4, 2, 1, bias=False),
            #nn.BatchNorm2d(ngf),
            #nn.ReLU(True),
            # state size. (ngf) x 32 x 32
            nn.ConvTranspose2d( ngf, nc, 4, 2, 1, bias=False),
            nn.Tanh()
            # state size. (nc) x 64 x 64
        )

    def forward(self, input):
        return self.main(input)

```

Now, we can instantiate the generator and apply the `weights_init` function. Check out the printed model to see how the generator object is structured.

```
In [6]: # Create the generator
netG = Generator(ngpu).to(device)

# Handle multi-gpu if desired
if (device.type == 'cuda') and (ngpu > 1):
    netG = nn.DataParallel(netG, list(range(ngpu)))

# Apply the weights_init function to randomly initialize all weights
# to mean=0, stdev=0.2.
netG.apply(weights_init)

# Print the model
print(netG)
```

```
Generator(
  (main): Sequential(
    (0): ConvTranspose2d(100, 32, kernel_size=(4, 4), stride=(1, 1), bias=False)
    (1): BatchNorm2d(32, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (2): ReLU(inplace)
    (3): ConvTranspose2d(32, 16, kernel_size=(4, 4), stride=(2, 2), padding=(1, 1), bias=False)
    (4): BatchNorm2d(16, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (5): ReLU(inplace)
    (6): ConvTranspose2d(16, 8, kernel_size=(4, 4), stride=(2, 2), padding=(1, 1), bias=False)
    (7): BatchNorm2d(8, eps=1e-05, momentum=0.1, affine=True, track_running_stats=True)
    (8): ReLU(inplace)
    (9): ConvTranspose2d(8, 1, kernel_size=(4, 4), stride=(2, 2), padding=(1, 1), bias=False)
    (10): Tanh()
  )
)
```

Discriminator ~~~~~

As mentioned, the discriminator, D , is a binary classification network that takes an image as input and outputs a scalar probability that the input image is real (as opposed to fake). Here, D takes a $3 \times 64 \times 64$ input image, processes it through a series of Conv2d, BatchNorm2d, and LeakyReLU layers, and outputs the final probability through a Sigmoid activation function. This architecture can be extended with more layers if necessary for the problem, but there is significance to the use of the strided convolution, BatchNorm, and LeakyReLUs. The DCGAN paper mentions it is a good practice to use strided convolution rather than pooling to downsample because it lets the network learn its own pooling function. Also batch norm and leaky relu functions promote healthy gradient flow which is critical for the learning process of both G and D .

Discriminator Code

```
In [7]: class Discriminator(nn.Module):
        def __init__(self, ngpu):
            super(Discriminator, self).__init__()
            self.ngpu = ngpu
            self.main = nn.Sequential(
                # input is (nc) x 64 x 64
                nn.Conv2d(nc, ndf, 4, 2, 1, bias=False),
                nn.LeakyReLU(0.2, inplace=True),
                # state size. (ndf) x 32 x 32
                nn.Conv2d(ndf, ndf * 2, 4, 2, 1, bias=False),
                nn.BatchNorm2d(ndf * 2),
                nn.LeakyReLU(0.2, inplace=True),
                # state size. (ndf*2) x 16 x 16
                nn.Conv2d(ndf * 2, ndf * 4, 4, 2, 1, bias=False),
                nn.BatchNorm2d(ndf * 4),
                nn.LeakyReLU(0.2, inplace=True),
                # state size. (ndf*4) x 8 x 8
                #nn.Conv2d(ndf * 4, ndf * 8, 4, 2, 1, bias=False),
                #nn.BatchNorm2d(ndf * 8),
                #nn.LeakyReLU(0.2, inplace=True),
                # state size. (ndf*8) x 4 x 4
                nn.Conv2d(ndf * 4, 1, 4, 1, 0, bias=False),
                nn.Sigmoid()
            )

        def forward(self, input):
            return self.main(input)
```

Now, as with the generator, we can create the discriminator, apply the `weights_init` function, and print the model's structure.


```
In [8]: # Create the Discriminator
netD = Discriminator(ngpu).to(device)

# Handle multi-gpu if desired
if (device.type == 'cuda') and (ngpu > 1):
    netD = nn.DataParallel(netD, list(range(ngpu)))

# Apply the weights_init function to randomly initialize all weights
# to mean=0, stdev=0.2.
netD.apply(weights_init)

# Print the model
print(netD)
```

```
Discriminator(
  (main): Sequential(
    (0): Conv2d(1, 8, kernel_size=(4, 4), stride=(2, 2), padding=(1,
1), bias=False)
    (1): LeakyReLU(negative_slope=0.2, inplace)
    (2): Conv2d(8, 16, kernel_size=(4, 4), stride=(2, 2), padding=(1,
1), bias=False)
    (3): BatchNorm2d(16, eps=1e-05, momentum=0.1, affine=True, track_ru
nning_stats=True)
    (4): LeakyReLU(negative_slope=0.2, inplace)
    (5): Conv2d(16, 32, kernel_size=(4, 4), stride=(2, 2), padding=(1,
1), bias=False)
    (6): BatchNorm2d(32, eps=1e-05, momentum=0.1, affine=True, track_ru
nning_stats=True)
    (7): LeakyReLU(negative_slope=0.2, inplace)
    (8): Conv2d(32, 1, kernel_size=(4, 4), stride=(1, 1), bias=False)
    (9): Sigmoid()
  )
)
```

Loss Functions and Optimizers ~~~~~~~~~

With D and G setup, we can specify how they learn through the loss functions and optimizers. We will use the Binary Cross Entropy loss (BCELoss

<<https://pytorch.org/docs/stable/nn.html#torch.nn.BCELoss>> __) function which is defined in PyTorch as:

$$\ell(x, y) = L = \{l_1, \dots, l_N\}^T, \quad l_n = - [y_n \cdot \log x_n + (1 - y_n) \cdot \log(1 - x_n)]$$

Notice how this function provides the calculation of both log components in the objective function (i.e. $\log(D(x))$ and $\log(1 - D(G(z)))$). We can specify what part of the BCE equation to use with the y input. This is accomplished in the training loop which is coming up soon, but it is important to understand how we can choose which component we wish to calculate just by changing y (i.e. GT labels).

Next, we define our real label as 1 and the fake label as 0. These labels will be used when calculating the losses of D and G , and this is also the convention used in the original GAN paper. Finally, we set up two separate optimizers, one for D and one for G . As specified in the DCGAN paper, both are Adam optimizers with learning rate 0.0002 and Beta1 = 0.5. For keeping track of the generator's learning progression, we will generate a fixed batch of latent vectors that are drawn from a Gaussian distribution (i.e. fixed_noise) . In the training loop, we will periodically input this fixed_noise into G , and over the iterations we will see images form out of the noise.

```
In [9]: # Initialize BCELoss function
criterion = nn.BCELoss()

# Create batch of latent vectors that we will use to visualize
# the progression of the generator
fixed_noise = torch.randn(64, nz, 1, 1, device=device)

# Establish convention for real and fake labels during training
real_label = 1
fake_label = 0

# Setup Adam optimizers for both G and D
optimizerD = optim.Adam(netD.parameters(), lr=lr, betas=(beta1, 0.999))
optimizerG = optim.Adam(netG.parameters(), lr=lr, betas=(beta1, 0.999))
```

Training ~~~~

Finally, now that we have all of the parts of the GAN framework defined, we can train it. Be mindful that training GANs is somewhat of an art form, as incorrect hyperparameter settings lead to mode collapse with little explanation of what went wrong. Here, we will closely follow Algorithm 1 from Goodfellow's paper, while abiding by some of the best practices shown in `ganhacks` <<https://github.com/soumith/ganhacks>> __. Namely, we will “construct different mini-batches for real and fake” images, and also adjust G's objective function to maximize $\log D(G(z))$. Training is split up into two main parts. Part 1 updates the Discriminator and Part 2 updates the Generator.

Part 1 - Train the Discriminator

Recall, the goal of training the discriminator is to maximize the probability of correctly classifying a given input as real or fake. In terms of Goodfellow, we wish to “update the discriminator by ascending its stochastic gradient”. Practically, we want to maximize $\log(D(x)) + \log(1 - D(G(z)))$. Due to the separate mini-batch suggestion from `ganhacks`, we will calculate this in two steps. First, we will construct a batch of real samples from the training set, forward pass through D , calculate the loss ($\log(D(x))$), then calculate the gradients in a backward pass. Secondly, we will construct a batch of fake samples with the current generator, forward pass this batch through D , calculate the loss ($\log(1 - D(G(z)))$), and *accumulate* the gradients with a backward pass. Now, with the gradients accumulated from both the all-real and all-fake batches, we call a step of the Discriminator's optimizer.

Part 2 - Train the Generator

As stated in the original paper, we want to train the Generator by minimizing $\log(1 - D(G(z)))$ in an effort to generate better fakes. As mentioned, this was shown by Goodfellow to not provide sufficient gradients, especially early in the learning process. As a fix, we instead wish to maximize $\log(D(G(z)))$. In the code we accomplish this by: classifying the Generator output from Part 1 with the Discriminator, computing G's loss *using real labels as GT*, computing G's gradients in a backward pass, and finally updating G's parameters with an optimizer step. It may seem counter-intuitive to use the real labels as GT labels for the loss function, but this allows us to use the $\log(x)$ part of the BCELoss (rather than the $\log(1 - x)$ part) which is exactly what we want.

Finally, we will do some statistic reporting and at the end of each epoch we will push our `fixed_noise` batch through the generator to visually track the progress of G's training. The training statistics reported are:

- **Loss_D** - discriminator loss calculated as the sum of losses for the all real and all fake batches ($\log(D(x)) + \log(D(G(z)))$).
- **Loss_G** - generator loss calculated as $\log(D(G(z)))$
- **D(x)** - the average output (across the batch) of the discriminator for the all real batch. This should start close to 1 then theoretically converge to 0.5 when G gets better. Think about why this is.
- **D(G(z))** - average discriminator outputs for the all fake batch. The first number is before D is updated and the second number is after D is updated. These numbers should start near 0 and converge to 0.5 as G gets better. Think about why this is.

Note: This step might take a while, depending on how many epochs you run and if you removed some data from the dataset.

```

In [10]: # Training Loop

# Lists to keep track of progress
img_list = []
G_losses = []
D_losses = []
iters = 0

print("Starting Training Loop...")
# For each epoch
for epoch in range(num_epochs):
    # For each batch in the dataloader
    for i, data in enumerate(dataloader, 0):

        #####
        # (1) Update D network: maximize log(D(x)) + log(1 - D(G(z)))
        #####
        ## Train with all-real batch
        netD.zero_grad()
        # Format batch
        real_cpu = data[0].to(device)
        b_size = real_cpu.size(0)
        label = torch.full((b_size,), real_label, device=device)
        # Forward pass real batch through D
        output = netD(real_cpu).view(-1)
        # Calculate loss on all-real batch
        errD_real = criterion(output, label)
        # Calculate gradients for D in backward pass
        errD_real.backward()
        D_x = output.mean().item()

        ## Train with all-fake batch
        # Generate batch of latent vectors
        noise = torch.randn(b_size, nz, 1, 1, device=device)
        # Generate fake image batch with G
        fake = netG(noise)
        label.fill_(fake_label)
        # Classify all fake batch with D
        output = netD(fake.detach()).view(-1)
        # Calculate D's loss on the all-fake batch
        errD_fake = criterion(output, label)
        # Calculate the gradients for this batch
        errD_fake.backward()
        D_G_z1 = output.mean().item()
        # Add the gradients from the all-real and all-fake batches
        errD = errD_real + errD_fake
        # Update D
        optimizerD.step()

        #####
        # (2) Update G network: maximize log(D(G(z)))
        #####
        netG.zero_grad()
        label.fill_(real_label) # fake labels are real for generator co
st

        # Since we just updated D, perform another forward pass of all-f

```

```
ake batch through D
    output = netD(fake).view(-1)
    # Calculate G's loss based on this output
    errG = criterion(output, label)
    # Calculate gradients for G
    errG.backward()
    D_G_z2 = output.mean().item()
    # Update G
    optimizerG.step()

    # Output training stats
    if i % 50 == 0:
        print('[%d/%d][%d/%d]\tLoss_D: %.4f\tLoss_G: %.4f\tD(x): %.4f\tD(G(z)): %.4f / %.4f'
              % (epoch, num_epochs, i, len(dataloader),
                 errD.item(), errG.item(), D_x, D_G_z1, D_G_z2))

    # Save Losses for plotting later
    G_losses.append(errG.item())
    D_losses.append(errD.item())

    # Check how the generator is doing by saving G's output on fixed
    _noise
    if (iters % 500 == 0) or ((epoch == num_epochs-1) and (i == len(
dataloader)-1)):
        with torch.no_grad():
            fake = netG(fixed_noise).detach().cpu()
            img_list.append(vutils.make_grid(fake, padding=2, normalize=
True))

    iters += 1
```

Starting Training Loop...

```

[0/5][0/469]   Loss_D: 1.2262  Loss_G: 0.7743  D(x): 0.5771  D(G
(z)): 0.4852 / 0.4646
[0/5][50/469]  Loss_D: 0.5651  Loss_G: 1.4237  D(x): 0.8186  D(G
(z)): 0.2998 / 0.2457
[0/5][100/469] Loss_D: 0.2735  Loss_G: 2.5098  D(x): 0.8761  D(G
(z)): 0.1257 / 0.0850
[0/5][150/469] Loss_D: 0.1213  Loss_G: 3.0445  D(x): 0.9446  D(G
(z)): 0.0590 / 0.0508
[0/5][200/469] Loss_D: 0.0612  Loss_G: 3.3929  D(x): 0.9811  D(G
(z)): 0.0410 / 0.0367
[0/5][250/469] Loss_D: 0.0408  Loss_G: 3.8207  D(x): 0.9882  D(G
(z)): 0.0278 / 0.0252
[0/5][300/469] Loss_D: 0.0240  Loss_G: 4.1598  D(x): 0.9949  D(G
(z)): 0.0187 / 0.0175
[0/5][350/469] Loss_D: 0.0203  Loss_G: 4.3342  D(x): 0.9968  D(G
(z)): 0.0169 / 0.0152
[0/5][400/469] Loss_D: 0.0150  Loss_G: 4.6336  D(x): 0.9978  D(G
(z)): 0.0127 / 0.0114
[0/5][450/469] Loss_D: 0.0139  Loss_G: 4.8258  D(x): 0.9977  D(G
(z)): 0.0115 / 0.0098
[1/5][0/469]   Loss_D: 0.0118  Loss_G: 4.9176  D(x): 0.9978  D(G
(z)): 0.0096 / 0.0085
[1/5][50/469]  Loss_D: 0.0099  Loss_G: 5.0373  D(x): 0.9982  D(G
(z)): 0.0081 / 0.0073
[1/5][100/469] Loss_D: 0.0074  Loss_G: 5.3453  D(x): 0.9983  D(G
(z)): 0.0057 / 0.0052
[1/5][150/469] Loss_D: 0.0085  Loss_G: 5.4442  D(x): 0.9974  D(G
(z)): 0.0059 / 0.0046
[1/5][200/469] Loss_D: 0.0071  Loss_G: 5.8664  D(x): 0.9975  D(G
(z)): 0.0046 / 0.0031
[1/5][250/469] Loss_D: 0.0466  Loss_G: 4.1165  D(x): 0.9808  D(G
(z)): 0.0267 / 0.0174
[1/5][300/469] Loss_D: 0.0391  Loss_G: 4.4494  D(x): 0.9827  D(G
(z)): 0.0212 / 0.0134
[1/5][350/469] Loss_D: 0.0311  Loss_G: 4.4097  D(x): 0.9817  D(G
(z)): 0.0122 / 0.0137
[1/5][400/469] Loss_D: 0.0284  Loss_G: 4.3807  D(x): 0.9814  D(G
(z)): 0.0094 / 0.0152
[1/5][450/469] Loss_D: 0.0650  Loss_G: 4.0385  D(x): 0.9672  D(G
(z)): 0.0297 / 0.0234
[2/5][0/469]   Loss_D: 0.0666  Loss_G: 4.0516  D(x): 0.9691  D(G
(z)): 0.0339 / 0.0202
[2/5][50/469]  Loss_D: 0.0436  Loss_G: 4.4736  D(x): 0.9791  D(G
(z)): 0.0218 / 0.0163
[2/5][100/469] Loss_D: 0.5480  Loss_G: 1.6110  D(x): 0.7758  D(G
(z)): 0.2384 / 0.2087
[2/5][150/469] Loss_D: 0.0993  Loss_G: 4.0572  D(x): 0.9596  D(G
(z)): 0.0536 / 0.0211
[2/5][200/469] Loss_D: 0.0386  Loss_G: 4.5503  D(x): 0.9854  D(G
(z)): 0.0233 / 0.0146
[2/5][250/469] Loss_D: 0.7795  Loss_G: 1.4861  D(x): 0.7561  D(G
(z)): 0.3544 / 0.2608
[2/5][300/469] Loss_D: 5.2035  Loss_G: 5.6033  D(x): 0.9978  D(G
(z)): 0.9917 / 0.0041
[2/5][350/469] Loss_D: 0.0523  Loss_G: 4.5947  D(x): 0.9649  D(G
(z)): 0.0144 / 0.0119

```

```

[2/5][400/469] Loss_D: 0.0642 Loss_G: 3.9895 D(x): 0.9716 D(G
(z)): 0.0340 / 0.0237
[2/5][450/469] Loss_D: 0.1082 Loss_G: 3.2428 D(x): 0.9244 D(G
(z)): 0.0261 / 0.0460
[3/5][0/469] Loss_D: 0.1178 Loss_G: 3.3015 D(x): 0.9336 D(G
(z)): 0.0454 / 0.0454
[3/5][50/469] Loss_D: 0.2780 Loss_G: 3.1929 D(x): 0.9526 D(G
(z)): 0.1946 / 0.0517
[3/5][100/469] Loss_D: 0.1359 Loss_G: 3.2587 D(x): 0.9148 D(G
(z)): 0.0410 / 0.0478
[3/5][150/469] Loss_D: 0.3163 Loss_G: 2.6980 D(x): 0.8502 D(G
(z)): 0.1284 / 0.0881
[3/5][200/469] Loss_D: 0.2121 Loss_G: 3.1579 D(x): 0.9446 D(G
(z)): 0.1390 / 0.0501
[3/5][250/469] Loss_D: 3.4731 Loss_G: 6.1782 D(x): 0.9993 D(G
(z)): 0.9596 / 0.0024
[3/5][300/469] Loss_D: 0.6767 Loss_G: 3.1966 D(x): 0.9785 D(G
(z)): 0.4618 / 0.0456
[3/5][350/469] Loss_D: 0.8148 Loss_G: 1.4803 D(x): 0.6951 D(G
(z)): 0.3353 / 0.2468
[3/5][400/469] Loss_D: 0.7527 Loss_G: 0.5340 D(x): 0.5290 D(G
(z)): 0.0144 / 0.6055
[3/5][450/469] Loss_D: 0.2606 Loss_G: 2.6242 D(x): 0.9148 D(G
(z)): 0.1503 / 0.0872
[4/5][0/469] Loss_D: 0.2843 Loss_G: 2.2676 D(x): 0.8648 D(G
(z)): 0.1204 / 0.1198
[4/5][50/469] Loss_D: 0.2856 Loss_G: 2.4114 D(x): 0.8694 D(G
(z)): 0.1281 / 0.1056
[4/5][100/469] Loss_D: 0.2516 Loss_G: 2.2890 D(x): 0.8684 D(G
(z)): 0.0966 / 0.1220
[4/5][150/469] Loss_D: 0.5598 Loss_G: 1.0730 D(x): 0.6373 D(G
(z)): 0.0626 / 0.3798
[4/5][200/469] Loss_D: 0.4369 Loss_G: 1.3019 D(x): 0.7011 D(G
(z)): 0.0454 / 0.3036
[4/5][250/469] Loss_D: 0.2653 Loss_G: 2.5762 D(x): 0.8701 D(G
(z)): 0.1100 / 0.0920
[4/5][300/469] Loss_D: 0.3553 Loss_G: 2.9089 D(x): 0.9060 D(G
(z)): 0.2116 / 0.0704
[4/5][350/469] Loss_D: 0.3657 Loss_G: 1.3084 D(x): 0.7577 D(G
(z)): 0.0686 / 0.3072
[4/5][400/469] Loss_D: 0.4814 Loss_G: 2.6518 D(x): 0.8686 D(G
(z)): 0.2711 / 0.0852
[4/5][450/469] Loss_D: 0.6150 Loss_G: 1.2039 D(x): 0.5926 D(G
(z)): 0.0257 / 0.3321

```


Results

Finally, lets check out how we did. Here, we will look at three different results. First, we will see how D and G's losses changed during training. Second, we will visualize G's output on the fixed_noise batch for every epoch. And third, we will look at a batch of real data next to a batch of fake data from G.

Loss versus training iteration

Below is a plot of D & G's losses versus training iterations.

```
In [11]: plt.figure(figsize=(10,5))
plt.title("Generator and Discriminator Loss During Training")
plt.plot(G_losses,label="G")
plt.plot(D_losses,label="D")
plt.xlabel("iterations")
plt.ylabel("Loss")
plt.legend()
plt.show()
```

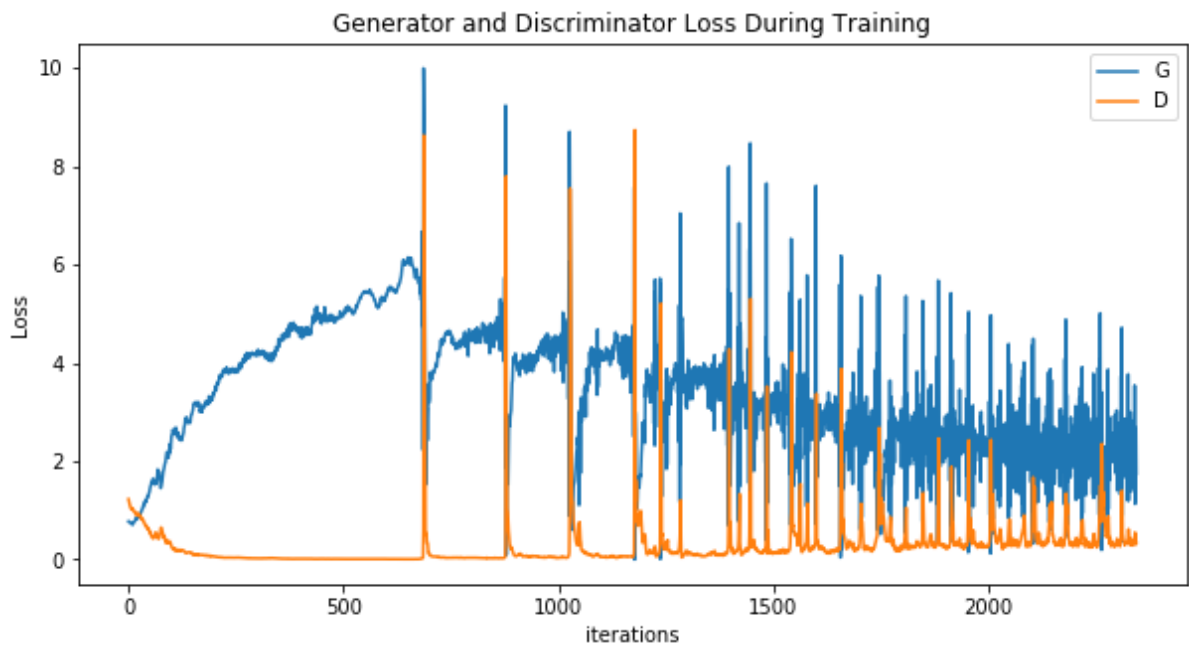


Visualization of G's progression

Remember how we saved the generator's output on the fixed_noise batch after every epoch of training. Now, we can visualize the training progression of G with an animation. Press the play button to start the animation.


```
In [12]: %%capture
fig = plt.figure(figsize=(8,8))
plt.axis("off")
ims = [[plt.imshow(np.transpose(i,(1,2,0)), animated=True)] for i in img
_list]
ani = animation.ArtistAnimation(fig, ims, interval=1000, repeat_delay=1000, blit=True)

HTML(ani.to_jshtml())
```

Out[12]:

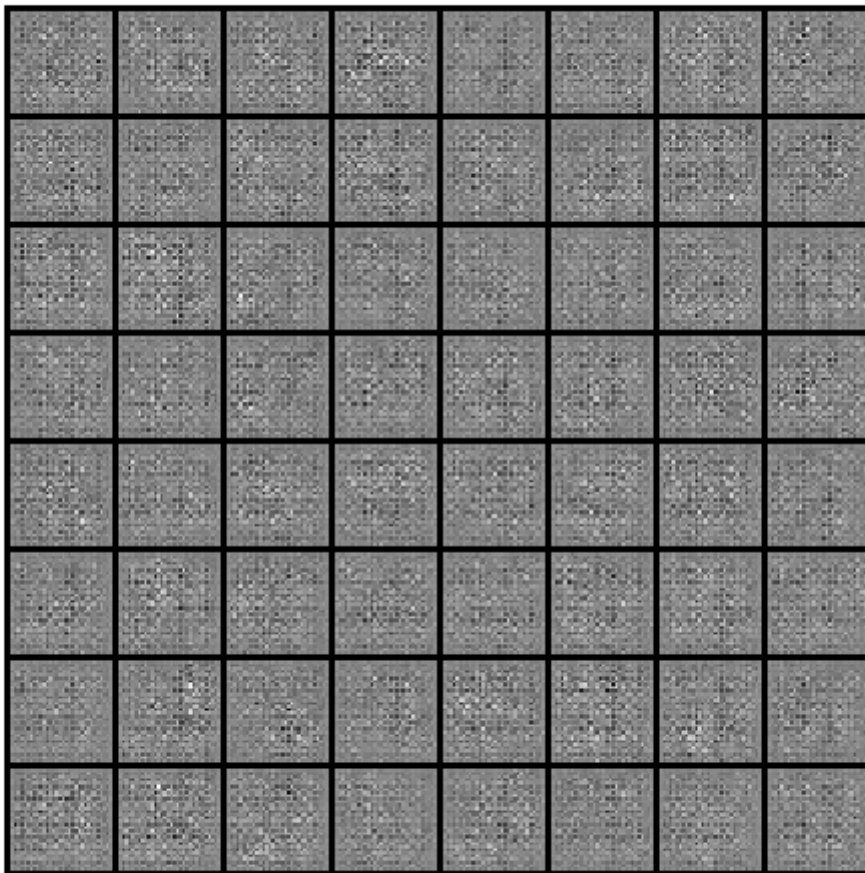

○ —————

- ⏮ ⏪ ⏩ ⏭ ⏮ ⏭ ⏭ +

Once Loop Reflect



Real Images vs. Fake Images

Finally, lets take a look at some real images and fake images side by side.

```
In [13]: # Grab a batch of real images from the dataloader
real_batch = next(iter(dataloader))

# Plot the real images
plt.figure(figsize=(15,15))
plt.subplot(1,2,1)
plt.axis("off")
plt.title("Real Images")
plt.imshow(np.transpose(vutils.make_grid(real_batch[0].to(device)[:64],
padding=5, normalize=True).cpu(),(1,2,0)))

# Plot the fake images from the last epoch
plt.subplot(1,2,2)
plt.axis("off")
plt.title("Fake Images")
plt.imshow(np.transpose(img_list[-1],(1,2,0)))
plt.show()
```



Where to Go Next

We have reached the end of our journey, but there are several places you could go from here. You could:

- Train for longer to see how good the results get
- Modify this model to take a different dataset and possibly change the size of the images and the model architecture
- Check out some other cool GAN projects here <<https://github.com/nashory/gans-awesome-applications>> __
- Create GANs that generate music <<https://deepmind.com/blog/wavenet-generative-model-raw-audio/>> __